


For a quiet walk!

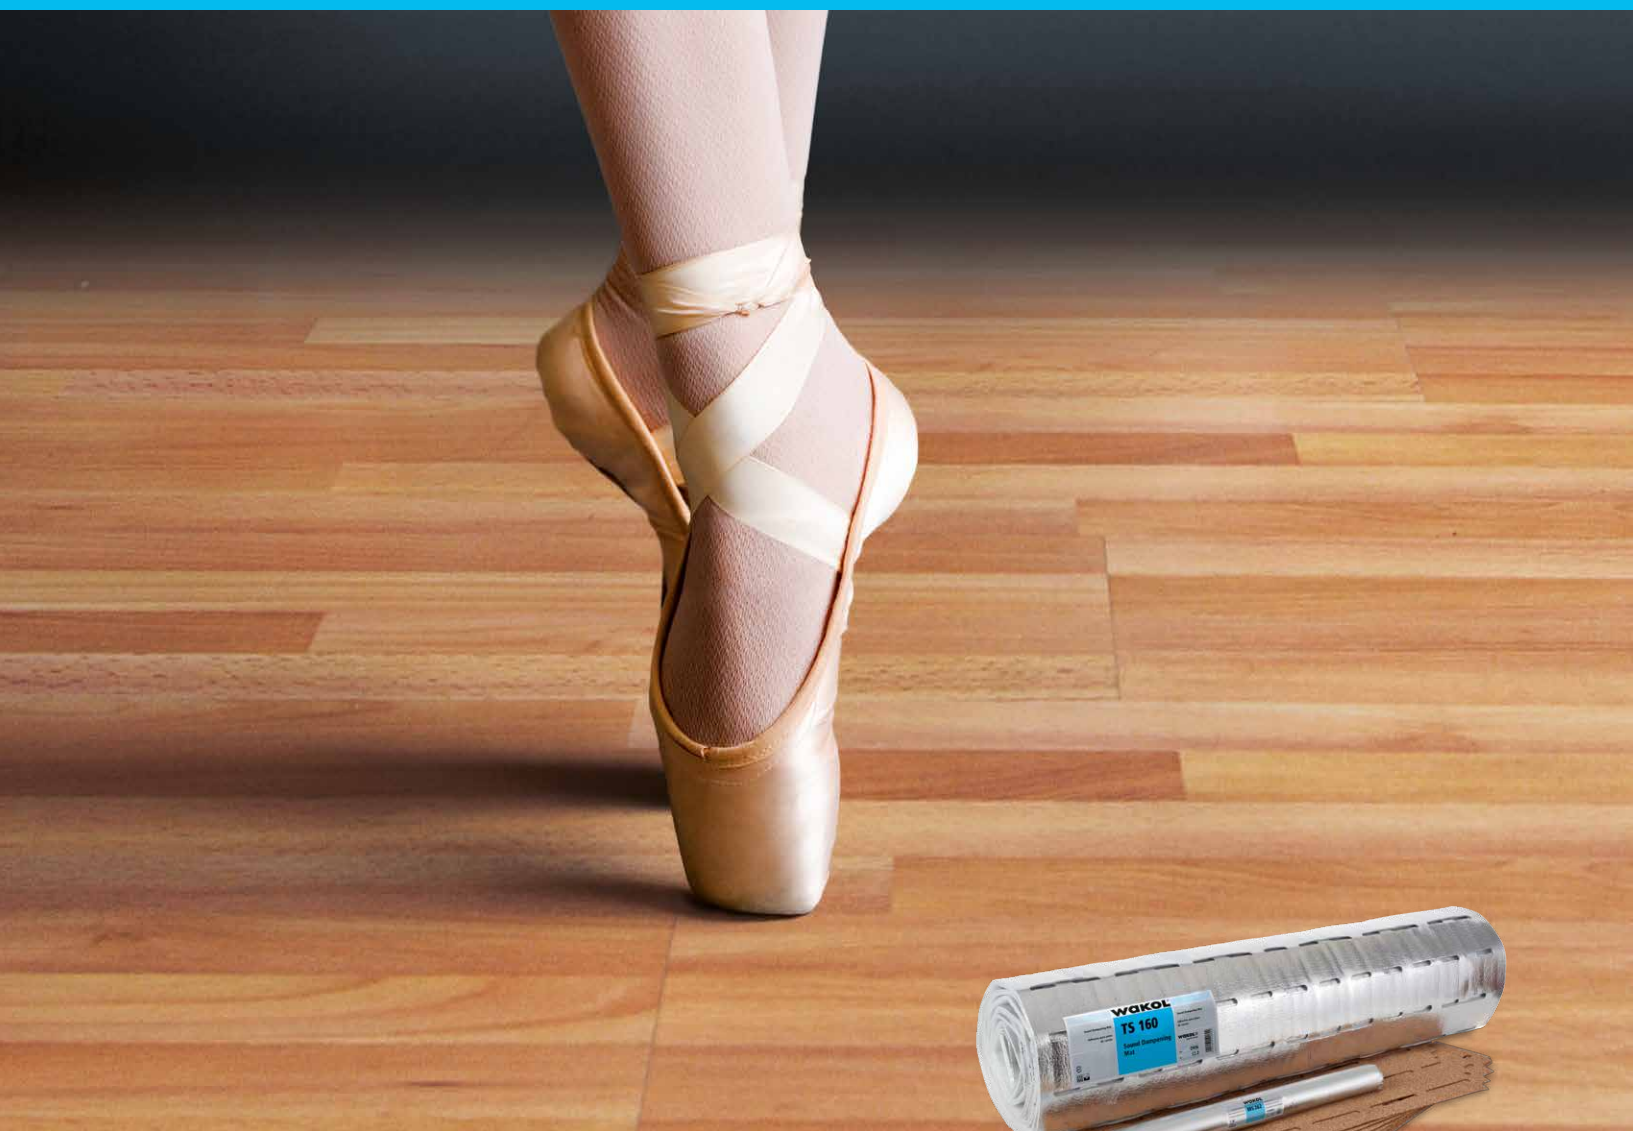

WAKOL MS 262 Wood Flooring Adhesive, firm-flexible with WAKOL TS 160 Sound Dampening Mat/ WAKOL TS 170 Sound Dampening Sheet

Quiet – optimal footfall soundproofing

Fast – installation and sound proofing in one single operation

Comfortable – easy clean-up of adhesive residue

State of the art – zero VOC, Isocyanate free, very low emissions according to EMICODE

Product:



WAKOL®
Anspruch verbindet

WAKOL MS 262 Wood Flooring Adhesive, firm-flexible with WAKOL TS 160 Sound Dampening Mat / WAKOL TS 170 Sound Dampening Sheet – footfall soundproofing quick and easy



Footfall soundproofing becomes easy

Requirements on footfall sound insulation are playing an increasingly important role particularly in multi-story construction especially when wood flooring is involved. WAKOL MS 262 Wood Flooring Adhesive, firm-flexible in combination with WAKOL TS 160 Sound Dampening Mat / WAKOL TS 170 Sound Dampening Sheet ensures optimal footfall soundproofing for end matched engineered and solid wood flooring. What usually is a multi-step installation process becomes simple and fast. All products meet the criteria of:

- Very low in emissions, EC1 PLUS*
- Meets Indoor Air Quality criteria of:
 - California Section 01350 · CHPS
 - Indoor Advantage Gold™
 - FloorScore
- Leed credit IEQ 4.1

WAKOL MS 262 Wood Flooring Adhesive, firm-flexible

- The MS polymer adhesive in the sausage
- Simple, easy to use
- Easy clean-up of adhesive residue – no etching of prefinished surfaces
- Can be used directly over WAKOL PU 280 Moisture Barrier
- Connected systems
- Passes SCAQMD Rule 1168 and BAAQMD requirements
- VOC free, 0g/l US regulatory

WAKOL TS 160 Sound Dampening Mat

- Slotted polypropylene soundproofing mat, 1/8 inch (3 mm)
- Easy handling thanks to light weight of 3.8 oz/sq.ft.
- Lays flat during installation through aluminum lamination
- VOC free, 0g/l US regulatory

WAKOL TS 170 Sound Dampening Sheet

- Slotted cork sheet, 3/32 inch (2,5 mm)
- Easy handling thanks to light weight of 1.56 oz/sq.ft.
- Lays flat during installation
- VOC free, 0g/l US regulatory

Installation and soundproofing in one single operation

Simply unroll WAKOL TS 160 Sound Dampening Mat loose respectively lay out WAKOL TS 170 Sound Dampening Sheet joint to joint. Then apply WAKOL MS 262 Wood Flooring Adhesive, firm-flexible with commercially available sausage gun or battery-operated WAKOL Applicator 50 in the symmetrically placed cut-outs in the WAKOL TS 160 Sound Dampening Mat / WAKOL TS 170 Sound Dampening Sheet. Lay wood flooring on top. Finished!

Footfall soundproofing for the highest requirements

Wood flooring installed with WAKOL MS 262 Wood Flooring Adhesive, firm-flexible on WAKOL TS 160 Sound Dampening Mat or WAKOL TS 170 Sound Dampening Sheet improves footfall soundproofing. The firm connection to the subfloor also greatly improves the impact sound insulation.

- ASTM E 492 IIC up to 74
- ASTM E 90 STC up to 66

Advanced protection of processor and consumer

WAKOL MS 262 Wood Flooring Adhesive, firm-flexible on WAKOL TS 160 Sound Dampening Mat / WAKOL TS 170 Sound Dampening Sheet is a unique footfall soundproofing system. And this along with all the advantages of state of the art MS technology, such as zero VOC, no Isocyanate and very low emissions according to the German norm EMICODE.

For all other information, please always refer to the Product Data Sheet.

* except for WAKOL MS 262 Wood Flooring Adhesive, firm-flexible (EC1 PLUS) and WAKOL TS 160 Sound Dampening Mat (EC1)



Loba-Wakol LLC
2401 Whitehall Park Drive - Suite 950
Charlotte, NC 28273, USA
Tel. +1 704 527 5919
Fax +1 704 527 5922
www.loba-wakol.com

WAKOL®
Anspruch verbindet